
STAINLESS STEEL · FOR ANGLE GRINDERS

Twist knot wheel brushes

Efficient twist knot wheel brushes in stainless steel wire for cleaning welds and removing rust and paint. Sizes 100–200 mm.



DIAMETER	MATERIAL	STANDARD	MAX. SPEED
100–200 mm	Stainless	EN 1083-2	12,500 rpm

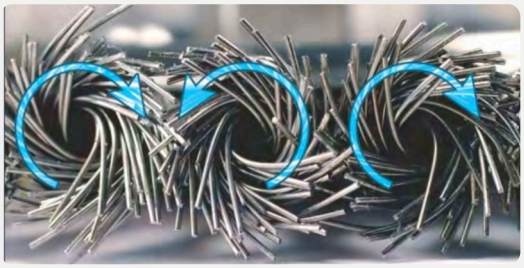

Twisted construction

Tightly twisted knots of stainless wire give an aggressive, even finish – also on aluminium welds.

SIZES AND ORDER NUMBERS

SIZE	MAX. RPM	ORDER NO.
100 mm	12,500	KLH-100-*
115 mm	12,500	KLH-115-*
125 mm	12,500	KLH-125-*
150 mm	10,000	KLH-150-*
175 mm	9,000	KLH-175-*
200 mm	6,500	KLH-200-*

Standard centre hole 22.3 mm

* = wire thickness, e.g. KLH-125-0,35

Threads: M10×1.5 · M14×2 · 5/8"-11





ALSO AVAILABLE

Wheel brush, crimped stainless wire

For a finer, more even finish – when cleaning and finishing surfaces.

Wire thickness **0.2 mm**

Centre hole 22.3 mm · Sizes and speeds on request.

⚠ Do not exceed the maximum speed marked on the brush. Wear safety glasses or a face shield and protective gloves. Always use the machine's guard.

Request a quote

Tell us what you need and how many – we'll find the right, cost-effective solution for you.

PHONE
+358 45 230 1717

EMAIL
kontel.fi@gmail.com

WEB
www.kontel.fi

Kontel Oy · Pornaistentie 650-22, 04130 Sipoo, Finland